S4 control panel

Wired accessories

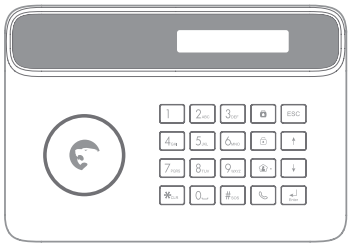

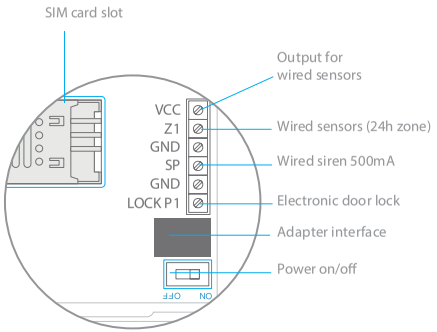

Wired detector



Wired detector
VCC = 7V to 12V

Electronic door lock



Electronic door lock
Door lock output:
- negative by default
- high signal when disarmed by RFID tag

Siren



Siren
SP output by default: 0V
SP output when the alarm is triggered: 11V

Product specifications subject to change (design, color, function, etc.). Images and text are non-contractual. Copyright © 2016 ETIGER. All rights reserved.